

GAS INNOVATIONS®

HIGH PURITY LP GAS TRANSPORT

MC 331 LP TRANSPORT

PROPANE, PROPYLENE, ISOBUTANE, BUTANE



TRANSPORT PROPANE, PROPYLENE, ISOBUTANE, BUTANE SPECIFICATIONS

HIGH PURITY LP GAS TRANSPORT		
SPECIFICATIONS:		
TARE WEIGHT	23,400Lbs.	
WATER VOLUME	10,600 Gal.	
DOT SPEC.	MC 331	
TRAILER LENGTH	46.5 FT.	
MAX WORKING PRESSURE	265 PSI.	
PROPANE	38,100 Lbs.	9,000 Gal.
PROPYLENE	38,100 Lbs.	8,700 GAL.
ISOBUTANE	38,100 Lbs.	8,100 GAL.
BUTANE	38,100 Lbs.	7,800 GAL.

SEE BACK FOR CONNECTIONS

LP GAS CONNECTIONS

Trailer Fill Port & Hose Connections for
PROPANE, PROPYLENE, ISOBUTANE, BUTANE




TRAILER HOSE CONNECTION
3 1/4 ACME



TRAILER HOSE CONNECTION
1 3/4 ACME

LP GAS DELIVERY CONNECTIONS

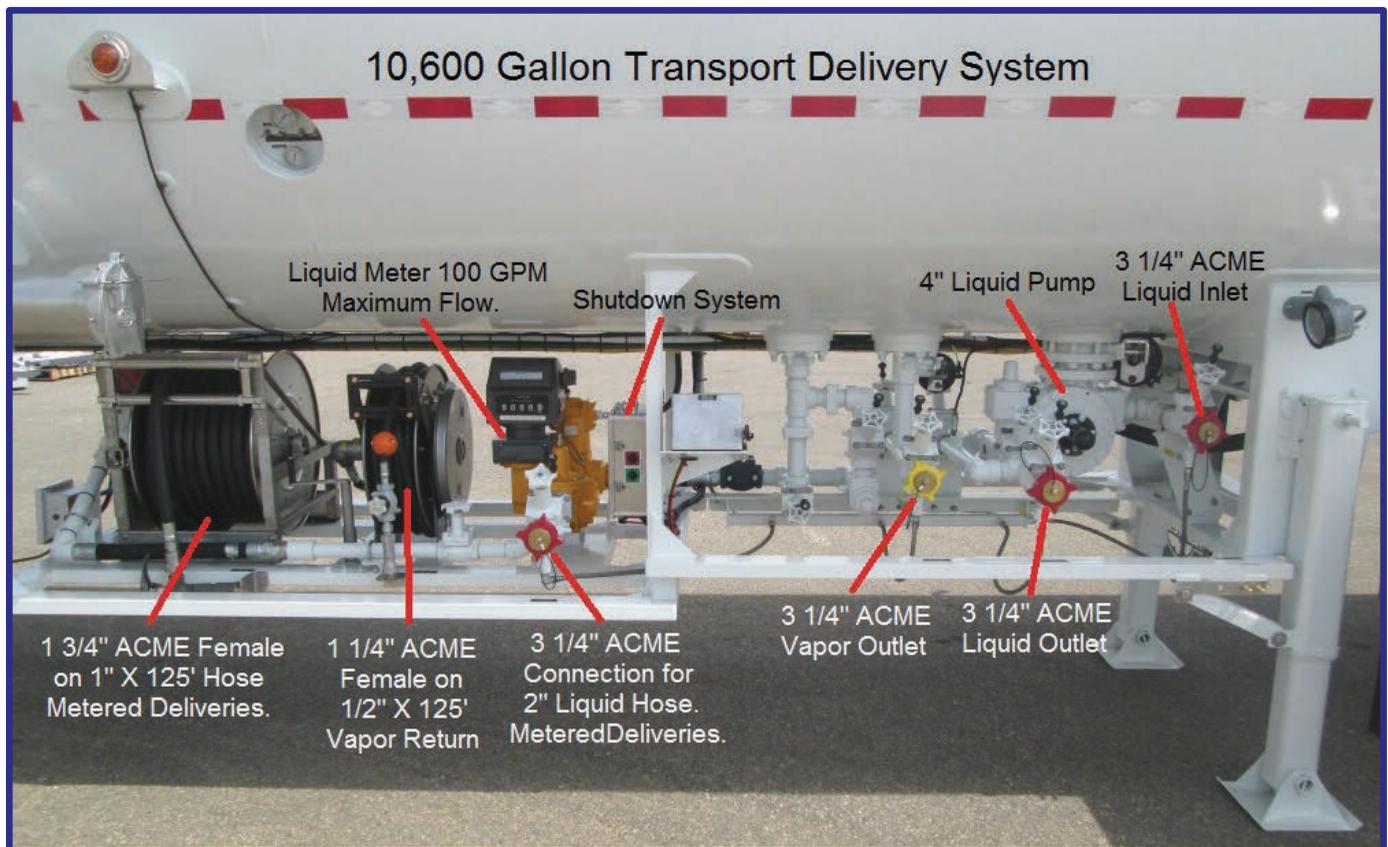

10,600 Gallon Transport Delivery System

Liquid Meter 100 GPM
Maximum Flow.

Shutdown System

4" Liquid Pump
3 1/4" ACME
Liquid Inlet

1 3/4" ACME Female
on 1" X 125' Hose
Metered Deliveries.

1 1/4" ACME
Female on
1/2" X 125'
Vapor Return

3 1/4" ACME
Connection for
2" Liquid Hose.
Metered Deliveries.

3 1/4" ACME
Vapor Outlet
3 1/4" ACME
Liquid Outlet

LP TRANSPORT MC 331 LP TRANSPORT PROPANE, ISOBUTANE, BUTANE



TRANSPORT PROPANE, ISOBUTANE, BUTANE SPECIFICATIONS

HIGH PURITY LP GAS TRANSPORT PUP		
SPECIFICATIONS:		
TARE WEIGHT	14,440 LBS.	
WATER VOLUME	5,100	
DOT SPEC.	MC 331	
TRAILER LENGTH	28 FT.	
MAX WORKING PRESSURE	250 PSI.	
PROPANE	17,218 Lbs.	4,080 GAL.
ISOBUTANE	19,119 LBS.	4,080 GAL.
BUTANE	19,625 LBS.	4,080 GAL.

SEE BACK FOR CONNECTIONS

LP GAS CONNECTIONS

Trailer Fill Port & Hose Connections for
PROPANE, ISOBUTANE & BUTANE



**1/2" X 50" Vapor Hose
W 1 1/4" Acme Female Connector.**

**2" Liquid Meter. 100 GPM Maximum
Average 50/60 GPM Normal Flow.**

Loading Connection, 3 1/4" ACME Vapor.

**1" X 125' Liquid Delivery
Hose W/ 1 3/4" Female
ACME Nozzle.**